


Reserve Studies | Insurance Appraisals | Wind Mitigation

COMMERCIAL WINDSTORM MITIGATION REPORT

The Gables Condominium Association, Inc.

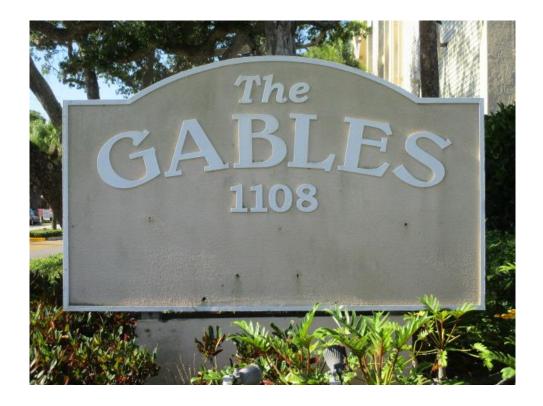

Prepared Exclusively for The Gables Condominium Association, Inc.

As of 4/18/2019 FPAT File# REN1912380

FELTEN PROFESSIONAL ADJUSTMENT TEAM 866.568.7853
www.FPATadjusters.com | info@FPATadjusters.com



<u>CERTIFICATION OF WINDSTORM MITIGATION AFFIDAVIT(S)</u>

This is to certify the enclosed Windstorm Mitigation Inspection report prepared for The Gables Condominium Association, Inc. is the result of work performed by Felten Professional Adjustment Team, LLC. and one or more of the individuals listed below.

In addition, we certify that, to the best of our knowledge and belief:

- All facts contained in this report are true and accurate.
- FPAT has no present or prospective interest in the subject property of this report, and also has no personal interest with respect to the parties involved.
- FPAT has no bias with respect to the subject property of this report or to the parties involved with this assignment.
- Our engagement in this assignment was not contingent upon producing or reporting predetermined results.
- Our compensation is not contingent on any action or event resulting from this report.
- ➤ We have the knowledge and experience to generate accurate windstorm mitigation affidavit(s) for insurance purposes on all buildings contained within this report.
- We have performed a physical inspection of the subject risk(s) contained in this report.
- > This report meets or exceeds the standards of the Citizens Inspection Outreach Program.

Key Staff:

Phillip E. Franco

General Adjuster # D003413
Flood Certification # 03010346
Certified Appraiser
Certified Construction Inspector, ACI, CCI
#7140

Brad Felten

Sr. Adjuster # E149535 Flood Certification # 06060373 Certified Wind & Hurricane Mitigation Inspector

John Felten

Sr. Adjuster # D075772 Flood Certification # 05030007 Certified Building Contractor # CBC1255984 Certified Wind & Hurricane Mitigation Inspector

Ian Wright

Sr. Adjuster # W273704 Certified Wind & Hurricane Mitigation Inspector



AERIAL MAPS OF PROPERTY







OIR-B1-1802 RECAPITULATION OF BUILDING MITIGATION FEATURES

The Gables Condominium Association, Inc.

Building	Roof Covering	Roof Deck Attachment	Roof-Wall Attachment	Roof Shape	SWR	Opening Protection
1108 Gulf Blvd, Units 101-307	FBC Equivalent	Level C	Clips	Other Roof		None or Some Glazed Openings



MIT-BT-II & III RECAPITULATION OF BUILDING MITIGATION FEATURES

The Gables Condominium Association, Inc.

Building	Roof Covering	Roof Deck Attachment	SWR	Opening Protection
1108 Gulf Blvd, Units 101-307	FBC Equivalent	Level A		None or Some
				Glazed Openings



Felten Professional Adjustment



Reserve Studies | Insurance Appraisals | Wind Mitigation

COMMERCIAL WINDSTORM MITIGATION REPORT (OIR-B1-1802)

The Gables Condominium Association, Inc. 1108 Gulf Blvd, Units 101-307 Indian Rocks Beach, FL 33785



As of 4/18/2019 FPAT File# REN1912380

FELTEN PROFESSIONAL ADJUSTMENT TEAM
866.568.7853
www.FPATadjusters.com | info@FPATadjusters.com



RECAPITULATION OF MITIGATION FEATURESFor 1108 Gulf Blvd, Units 101-307

1. <u>Building Code:</u> Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1985 per Pinellas County

Property Appraiser.

2. Roof Covering: FBC Equivalent

Comments: The roof covering was replaced in 2018. The roof permit was

confirmed and the permit number is 2018326. This roof was verified as meeting the building code requirements outlined on the mitigation

affidavit.

3. Roof Deck Attachment: Level C

Comments: Inspection verified 1/2" plywood roof deck attached with 8d nails at

a minimum 6" on the edge & 6" in the field.

4. Roof to Wall Clips

Attachment:

Comments: Inspection verified hurricane clips fastened with a minimum of three

nails.

5. Roof Geometry: Other Roof

Comments: Inspection verified a gable roof shape.

6. SWR: Yes


Comments: SWR was verified at time of inspection. The Secondary Water

Resistance verified is a self-adhering peel and stick.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some metal shutter opening protection. Not all

glazed openings were protected with impact resistant coverings.

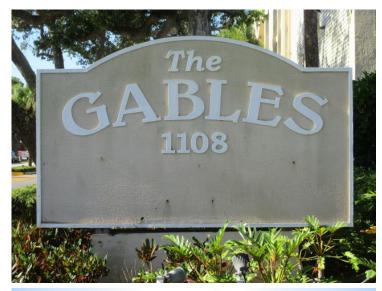

Address Verification



Exterior Elevation





Roof Construction



Roof Construction





Roof Construction



Roof Construction



Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 4/18/2019						
Owner Information						
Owner Name: The Gables Condominium A	Contact Person: Chuck Rodriguez					
Address: 1108 Gulf Blvd, Units 101-307		Home Phone:				
City: Indian Rocks Beach	Zip: 33785	Work Phone: (407) 924-9395				
County: Pinellas		Cell Phone:				
Insurance Company:		Policy #:				
Year of Home: 1985	# of Stories: 4	Email:				

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

1.	Building Code : Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in
	the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
[]	A. Built in compliance with the FBC: Year Built . For homes built in 2002/2003 provide a permit application with a date after
	3/1/2002: Building Permit Application Date (MM/DD/YYYY)
[]	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996
	provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//
[X	[7] C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
[X] 1. Asphalt/Fiberglass Shingle	4/25/2018			
[] 2. Concrete/Clay Tile				[]
[] 3. Metal				[]
[] 4. Built Up				[]
[] 5. Membrane				[]
[] 6. Other				[]

- [X] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- [] B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. **Roof Deck Attachment**: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [X] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

	A										
Inspectors Initials	0'	_Property	Address	1108	Gulf	Blvd,	Units	101-307,	Indian	Rocks	Beach

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

182 psf.				
[] D. Reinforced Conc	rete Roof Deck.			
[] E. Other:				
[] F. Unknown or unid	lentified.			
[] G. No attic access.				
	hment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks within or outside corner of the roof in determination of WEAKEST type)			
[] Tru top p	ass/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the late of the wall, or			
[] IME	tal connectors that do not meet the minimal conditions or requirements of B, C, or D			
	s to qualify for categories B, C, or D. All visible metal connectors are:			
[X]A	ecured to truss/rafter with a minimum of three (3) nails, and ttached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.			
[X] B. Clips				
[] Me	Metal connectors that do not wrap over the top of the truss/rafter, or etal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail on requirements of C or D, but is secured with a minimum of 3 nails.			
C. Single Wraps	•			
r	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.			
D. Double Wraps				
beam minir [] Me	tal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a num of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or stal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on sides, and is secured to the top plate with a minimum of three nails on each side.			
	r bolts structurally connected or reinforced concrete roof.			
[] F. Other:				
[] G. Unknown or unic	dentified			
[] H. No attic access				
	That is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of ver unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).			
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:			
Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft				
[X] C. Other Roof	Any roof that does not qualify as either (A) or (B) above.			
	Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) ed Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the			
from water int	pam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling rusion in the event of roof covering loss.			
[] B. No SWR.	otomoino d			
[] C. Unknown or und	eterminea.			

or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least

Inspectors Initials Property Address 1108 Gulf Blvd, Units 101-307, Indian Rocks Beach

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart			Glazed Openings				Non-Glazed Openings	
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors	
N/A	Not Applicable- there are no openings of this type on the structure							
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)							
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)							
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance							
	Opening Protection products that appear to be A or B but are not verified							
N	Other protective coverings that cannot be identified as A, B, or C							
Х	No Windborne Debris Protection							

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115
- or X in the table above

 A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above

 B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only)

 All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):

☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N,

- ASTM E 1886 and ASTM E 1996 (Large Missile 4.5 lb.)
- SSTD 12 (Large Missile 4 lb. to 8 lb.)
- For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)

☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist

- ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
- ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
- [] <u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
 - ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
 - ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
 - ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 1108 Gulf Blvd, Units 101-307, Indian Rocks Beach

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

PAT File	#REN1	19123	880
----------	-------	-------	-----

[] N. Exterior Opening Protection (unverified shutter system) protective coverings not meeting the requirements of "B" with no documentation of compliance (Level N is	Answer "A", "B", or C" or				
□ N.1 All Non-Glazed openings classified as Level A, B, C, or	N in the table above, or no No	on-Glazed	openings exist		
☐ N.2 One or More Non-Glazed openings classified as Level I table above					
☐ N.3 One or More Non-Glazed openings is classified as Leve	l X in the table above				
[X] X. None or Some Glazed Openings One or more Glazed	openings classified and Lev	el X in th	e table above.		
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi					
Qualified Inspector Name: John Felten	License Type: CBC		License or Certificate #: CBC1255984		
Inspection Company: Felten Professional Adjustment Te	eam, LLC.	Phone:	866-568-7853		
Qualified Inspector – I hold an active license as a:	(check one)				
☐ Home inspector licensed under Section 468.8314, Florida Statutes training approved by the Construction Industry Licensing Board at			r of hours of hurricane mitigation		
 □ Building code inspector certified under Section 468.607, Florida Section □ General, building or residential contractor licensed under Section 					
\square Professional engineer licensed under Section 471.015, Florida Sta	itutes.				
\square Professional architect licensed under Section 481.213, Florida Sta	itutes.				
Any other individual or entity recognized by the insurer as possess verification form pursuant to Section 627.711(2), Florida Statutes		ns to prope	erly complete a uniform mitigation		
under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection. I, Iohn Felten am a qualified inspector and I personally performed the inspection or (licensed contractors and professional engineers only) I had my employee (James Sheets) perform the inspection and I agree to be responsible for his/her work.					
Je At					
Qualified Inspector Signature:Date	e: <u>4/18/2019</u>				
An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.					
Homeowner to complete: I certify that the named Qualified residence identified on this form and that proof of identification					
Signature:D	ate:				
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)					
The definitions on this form are for inspection purposes only and cannot be hurricanes.	e used to certify any product or o	constructio	n feature as offering protection from		

Inspectors Initials Property Address 1108 Gulf Blvd, Units 101-307, Indian Rocks Beach

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

Felten Professional Adjustment



Reserve Studies | Insurance Appraisals | Wind Mitigation

COMMERCIAL WINDSTORM MITIGATION REPORT (MIT-BT II & III)

The Gables Condominium Association, Inc. 1108 Gulf Blvd, Units 101-307 Indian Rocks Beach, FL 33785



As of 4/18/2019 FPAT File# REN1912380

FELTEN PROFESSIONAL ADJUSTMENT TEAM
866.568.7853
www.FPATadjusters.com | info@FPATadjusters.com



RECAPITULATION OF MITIGATION FEATURES For 1108 Gulf Blvd, Units 101-307

1. Roof Covering: FBC Equivalent

Comments: The roof covering was replaced in 2018. The roof permit was

confirmed and the permit number is 2018326. This roof was verified as meeting the building code requirements outlined on the mitigation

affidavit.

2. Roof Deck Attachment: Level A

Comments: Inspection verified 1/2" plywood roof deck attached with 8d nails at

a minimum 6" on the edge & 6" in the field.

3. SWR: Yes


Comments: SWR was verified at time of inspection. The Secondary Water

Resistance verified is a self-adhering peel and stick.

4. **Opening Protection:** None or Some Glazed Openings

Comments: Inspection verified some metal shutter opening protection. Not all

glazed openings were protected with impact resistant coverings.

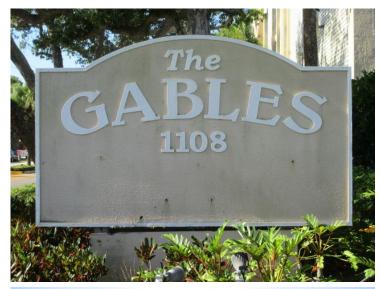

Address Verification



Exterior Elevation



Roof Construction



Roof Construction





Roof Construction



Roof Construction



CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

This Mitigation Inspection Form must be completed to capture mitigation features applicable to a Type II (4 to 6 story) or Type III (7 or more story) building. This Inspection Form is required for either residential condominium unit owners or commercial residential applicants requesting mitigation credits in such buildings.

WIND LOSS MITIGATION INFORMATION						
PREMISES #:	1	SUBJECT OF INSURANCE: The Gables Condominium Association, Inc.	POLICY#:			
BUILDING #:	1	STREET ADDRESS: 1108 Gulf Blvd. Units 101-307, Indian Rocks Beach. FL 33785				
# STORIES: 4 BLDG DESCRIPTION:4-Story Residential Condominium Building						
BUILDING TYPE:		[X] (4 to 6 stories) [] (7 or more stories)				

Terrain Exposure Category must be provided for each insured location.

I hereby certify that the building or unit at the address indicated above **TERRAIN EXPOSURE CATEGORY** as defined under the Florida Building Code is (Check One): **[X] Exposure C** or **[] Exposure B**

Certification below for purposes of **TERRAIN EXPOSURE CATEGORY** above does not require personal inspection of the premises.

Certification of Wind Speed is required to establish the basic wind speed of the location (Complete for Terrain B only if Year Built On or After Jan. 1, 2002).

I hereby certify that the basic WIND SPEED of the building or unit at the address indicated above based upon county wind speed lines defined under the Florida Building Code (FBC) is (Check One):

[] ≥100 or [] ≥110 or [X] ≥120

Certification of Wind Design is required when the buildings is constructed in a manner to exceed the basic wind speed design established for the structure location (Complete for Terrain B only if Year Built On or After Jan.1, 2002).

I hereby certify that the building or unit at the address indicated above is designed and mitigated to the Florida Building Code (FBC) WIND DESIGN of (Check One): ☐ ≥100 or ☐ ≥110 or ☐ ≥120

Certification for the purpose of establishing the basic **WIND SPEED or WIND SPEED DESIGN** above does not require personal inspection of the premises.

Specify the type of mitigation device(s) installed:

- 1		Doo	500	verinas
	_	KUU	LO	vermus

Roof Covering Material: Dimensional Shingle Date of Installation: 2018

[] Level A (Non FBC Equivalent) – Type II or III

One or more roof coverings that do not meet the FBC Equivalent definition below.

[X] Level B (FBC Equivalent) - Type II or III

Single-Ply, Modified Bitumen, Sprayed Polyurethane foam, Metal, Tile, Built-up, Asphalt Shingle or Rolled Roofing, or other roof covering membranes/products that at a minimum meet the 2001 or later Florida Building Code or the 1994 South Florida Building Code and have a Miami-Dade NOA or FBC 2001 Product Approval listing that is/was current at the time of installation.

All mechanical equipment must be adequately tied to the roof deck to resist overturning and sliding during high winds. Any flat roof covering with flashing or coping must be mechanically attached to the structure with face fasteners (no clip/cleat systems), and asphalt roof coverings on flat roofs must be 10 years old or less.

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

FPAT File # REN1912380

2.	Roof Deck Attachment [] No Attic Access				
	[X] Level A – Wood or Other Deck Type II only				
	Roof deck composed of sheets of structural panels (plywood or OSB). <i>Or</i>				
	Architectural (non-structural) metal panels that require a solid decking to support weight and loads. Or				
	Other roof decks that do not meet Levels B or C below.				
	[] Level B – Metal Deck Type II or III				
	Metal roof deck made of structural panels fastened to open-web steel bar joists and integrally attached to the wall.				
	[] Level C – Reinforced Concrete Roof Deck Type, II or III A roof structure composed of cast-in-place or pre-cast structural concrete designed to be self-supporting and integrally attached to wall/support system.				
3.	Secondary Water Resistance [] None				
	[X] Underlayment				
	A self-adhering polymer modified bitumen roofing underlayment (thin rubber sheets with peel and stick underside located beneath the roof covering and normal felt underlayment) with a minimum width of 6" meeting the requirements of ASTM D 1970 installed over all plywood/OSB joints to protect from water intrusion. All secondary water resistance products must be installed per the manufacturer's recommendations. Roofing felt or similar paper based products are not acceptable for secondary water resistance.				
	П =				
	Foamed Adhesive A foamed polyurethane sheathing adhesive applied over all joints in the roof sheathing to protect interior from water intrusion.				
4.	Opening Protection [X] None or Some				
	[] Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of:				
	□ SSTD12;				
	☐ ASTM E 1886 and ASTM E 1996;				
	☐ Miami-Dade PA 201, 202, and 203;				
	☐ Florida Building Code TAS 201, 202 and 203.				
	All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.				
	[] Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of:				
	☐ ASTM E 1886 and ASTM E 1996				
	All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.				

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

FPAT File # REN1912380

CERTIFICATION

I certify that I hold an	active license as a: (CHECK C	ONE OF THE FOLLOWING)			
□ General or buildir	☐ General or building contractor licensed under Section 489.111, Florida Statutes.					
☐ Building code ins	☐ Building code inspector certified under Section 468.607, Florida Statutes.					
Professional arcl	☐ Professional architect licensed under Section 481.213, Florida Statutes.					
☐ Professional engineer licensed under Section 471.015, Florida Statutes.						
	nally inspected the premises at the L professional opinion, based on my kr					
This Mitigation Inspection Form and the information set forth in it are provided solely for the purpose of verifying that certain structural or physical characteristics exist at the Location Address listed above and for the purpose of permitting the Named Insured to receive a property insurance premium discount on insurance provided by Citizens Property Insurance Corporation and for no other purpose. The undersigned does not make a health or safety certification or warranty, express or implied, of any kind, and nothing in this Form shall be construed to impose on the undersigned or on any entity to which the undersigned is affiliated any liability or obligation of any nature to the named insured or to any other person or entity.						
ame of Company: <u>Felten Professional Adjustment Team, LLC.</u>			Phone:	(866)-568-7853		
Name of Inspector	John Felten	License Type <u>CBC</u>	License #	CBC1255984		
Inspection Date:	4/18/2019	<u>-</u>				
Signature:	RAT.		Date:	4/18/2019		
Applicant's Sign	nature:		_ Date:			

^{*}Applicant /Insured's signature must be from the Board President and another member of the board for condo and homeowner's associations or an officer of the named insured for all other business entities.

[&]quot;Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony of the third degree."

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.